
Specification

*The model shown is equipped with optional features.



Model			LM531	LM531	
Dimensions	Total length		119.29 in	303 cm	
	T . I	During operation	116.5 in	296 cm	
	Total width	During transport	86.6 in	220 cm	
	Total height	steering wheel	52.4 in	133 cm	
		ROPS	77.17 in	196 cm	
Weight (empty fuel tank)		with Slight lift, ROPS	2755.7 lb	1,250 kg	
Minimum turning radius			110.2 in	280 cm	
Engine	Model		Kubota D1105-E4B(Diesel)		
	Туре		Vertical Water-cooled 4-cycle diesel engine		
	Total displacement		68.52 cu.in.	1,123 cm³ (1.123 L)	
	Maximum output		17.3 kW(23.5 PS)/3,000 rpm	17.3 kW(23.5 PS)/3,000 rpm	
Fuel tank capacity			Diesel 10.04 U.S.gal.	Diesel 38.0 dm³ (38.0 L)	
Operating width (Mowing width)			99.2 in	252 cm	
Operating height (Mowing height)			0.394 - 2.362 in	10 - 60 mm	
Blades			9		
Drive	Traveling		HST (Full time 4WD)	HST (Full time 4WD)	
	Mowing		Hydraulic	Hydraulic	
Speed (HST)	Forward		0 - 9.94 mph	0 - 16.0 km/h	
	Reverse		0 - 4.97 mph	0 - 8.0 km/h	
Efficiency			4.98 acres/hour	20,160 m²/h	
			(6.22 mph x mowing width x 0.8)	(10.0 km/h x mowing width x 0.8)	

The factory default maximum engine rpm is 3,100 rpm.

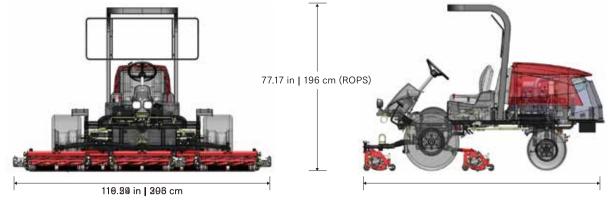

Read the Owner's Operating Manual and other training material carefully.

Be familiar with the controls, safety signs and the proper use of equipment before operation.

Assurance inspection

- Regular inspection of the machine ensures long-lasting superior performance and safety.
 There are parts of machine prone to wear and deterioration from long periods of use.
 Please consult with local dealer or distributor for proper inspection and maintenance schedule.

株式会社 共栄社


KYOEISHA CO., LTD.

1-26, Miyuki-cho, Toyokawa-city, Aichi-pref, 442-8530 JAPAN TEL+81 533-84-1390 FAX+81 533-84-1220



www.baroness.co.jp

- •Content and designs provided here are subject to change without notice.
- Colors in print may slightly vary from actual colors.
- Ocatalog No:LM531-US/20C-0000-KES







5-Unit Reel Mower



Lightweight, basic fairway mower, designed for simplicity with a low center of gravity

The LM531's features of uniform weight distribution, optimum unit layout, low center of gravity, and light weight, combined with Baroness' outstanding reel cutter and bedknife technology, lead to a stable, turf-friendly performance.

Excellent Climbing Power

The Cross Circuit Hydraulic Drive system and the low center of gravity design allow excellent climbing power. Even when cutting on steep slopes, the Cross Circuit Hydraulic Drive system enables stable operation without the rear wheels slipping and prevents damage to the turf. The low center of gravity minimizes the transfer of weight on sloping terrain, thus reducing damage to the turf.



Turf-Friendly Design

Uniform weight distribution and light weight lead to lower treading stress. When turning during operation or traveling on a muddy fairway, the LM531 does not leave tire marks, thus contributing to keeping the beautiful condition of the fairway.

*The above weights were measured on level ground with an empty fuel tank and without an operator.

Optimum Unit Layout

The unit layout is designed to prevent uncut turf. Keeping the distance between the mid-mount mowers and the front wheel axle as short as possible ensures that there is no surface uncut when mowing peripheral or sloped areas.



Simple Design

The Kubota D1105 engine, capable of a maximum output of 17.3 kW (23.5 PS), does not require an exhaust aftertreatment device. The simplicity in the machine's design lessens mechanical failure and makes maintenance easy. In addition, there are fewer parts requiring replacement, which translate into reduced maintenance costs.



High Efficiency Design

The engine output is about half that of a typical large fairway mower. When operating on slopes, however, the high-torque hydraulic circuit system and lightweight design make it possible to achieve operational performance equivalent to that of a large fairway mower.



Large-Capacity Reel Motor

capable of high torque which allows the

machine to maintain consistent cutting

quality without the reel rotation slowing

down when cutting through tougher


conditions.

The large-capacity reel motors are

Mower Units Capable Of Clean Finish

A lightweight and simply-designed 22 inch model is used for mower units. By expanding its approach angle in the vertical direction, the mower excels in following the undulating surface in the longitudinal direction. Because of the 22 inch size, the mower can also follow the undulation in the lateral direction, thus producing a beautiful finish. Optional attachments include the following: CR brush, front scraper, rear scraper, and grass catcher. You can select them according to the turf condition.





Baroness Reel Cutter

Equipped with the world-renowned, high-quality Baroness reel cutter, the LM531 can beautifully mow any type of grass. The cleanly-cut grass is less susceptible to diseases, thus creating healthier turf.



Quality on Demand

5-Unit Reel Mower

LN531

