


# Redexim



A E R A T I O N

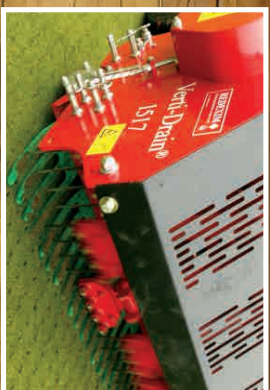

## V e r t i - D r a i n 1517

The new Redexim Verti-Drain 1517 is part of the new high speed 15 series featuring lighter weight machines which still offer the market leading Verti-Drain quality and performance. Suitable for use with a tractor from as little as 28hp and ideal for work on golf greens, the Redexim Verti-Drain 1517 offers a productive 68" operating width.

It can work to 6" (150mm) deep, but weighs in at just 1,100 lbs.

FEATURE	BENEFIT
High Speed	More productivity
Belt Drive	More economical, simple maintenance
Light weight	Can be used with compact tractor

# Verti-Drain 1517



SPECIFICATIONS	DESCRIPTION
Working width	69" (1.76 m)
Working depth	Up to 6" (150 mm)
Tractor speed measured at 540 rpm on PTO	(max.) Up to 540 rpm
Weight	1146 lbs (520 kg)
Distance between tines	2-1/8" (55 mm)
Recommended tractor	28 HP with minimum lift capacity of 1653 lbs (750 kg)
Maximum capacity	Up to 76725ft <sup>2</sup> /hr (7128 m <sup>2</sup> /hr)
Dimensions	80.7" x 38.2" x 30.7" (2.05 x 970 x 780 mm)
Maximum tine diameter Solid Hollow	1/2" x 6" (12 x 150 mm) 3/4" x 6" (19 x 150 mm)
Three-point hitch	3-point CAT 1 3-point CAT 1
Standard components	<ul style="list-style-type: none"> <li>- Set solid tines 12 x 150 (1/2"x6") with accompanying tineholders.</li> <li>- Case with tools and user manual.</li> <li>- PTO Shaft.</li> <li>- Support legs.</li> </ul>

## Tine Selections

ITEM#	PART #	DESCRIPTION	USE WITH ITEM #	MTH BLOCK #	COMMENT	QTY.
4	311.180.780	Shank 18 / 12mm	na	na	na	32
5	311.120.690	Shank 12mm	na	na	na	32
11	317.322.150	Folded Hollow Tine 7/8" x 6" (22 x 150mm)	4 + 12	na	na	32
12	438.220.220	Clip Ø22	na	na	na	32
14	317.316.150	Folded Hollow Tine 5/8" x 6" (16 x 150mm)	5 + 15	na	na	32
29	311.219.150	Hollow Tine - 3/4" x 15/32" x 6" (19 x 12 x 150mm) - 12mm shank	na	na	311.719.150 Tube only	32
30	311.216.150	Hollow Tine - 5/8" x 3/8" x 6" (16 x 10 x 150mm) - 12mm shank	na	na	311.716.150 Tube only	32
31	311.210.127	Hollow Tine - 3/8" x 1/4" x 5" (10 x 6 x 125mm)	35 or MTH	314.430.209	MTH block configuration	32 / 64 (MTH)
32	311.210.080	Hollow Tine - 3/8" x 1/4" x 3" (10 x 6 x 80mm)	35 or MTH	314.430.209	MTH block configuration	32 / 64 (MTH)
34	311.619.120	Chisel Tine - 3/16" x 3/4" x 4 3/4" (4.8 x 19 x 120mm) - 12mm shank	na	na	na	32
35	314.208.043	Adapter 8mm Tine	na	na	When using 8mm tines	32 / 64 (MTH)
37	9990075	Hollow Tine - 13/16" x 1/2" x 5" (21 x 12 x 125mm) 19mm mounting	na	na	Hollow tine configuration	32
38	311.219.159	Hollow Tine - 3/4" x 3/8" x 5" (19 x 10 x 125mm) 19mm mounting	na	na	Hollow tine configuration	32
39	311.219.158	Hollow Tine - 3/4" x 3/8" x 4 3/8" (19 x 10 x 110mm) 19mm mounting	na	na	Hollow tine configuration	32
40	311.219.138	Hollow Tine - 5/8" x 1/4" x 4 3/8" (16 x 7 x 110mm) 19mm mounting	na	na	Hollow tine configuration	32
41	39200.447	Solid Tine - 3/8" x 4" (10 x 100mm) - 19mm mounting	na	na	Hollow tine configuration	32
43	311.619.127	Chisel Tine 3/16" x 1 3/16" x 3 1/2" (5 x 30 x 90mm) 19mm mounting	na	na	Hollow tine configuration	32

